

JOB NAME: _____

DATE: _____

TYPE: _____




Surface Mount
Bracket Included

LPS-S4-50K-D
LPS-S4-40K-D
LPS-S4-30K-D

DIMENSIONS:

5.11"(L)X5.11"(W)X0.51"(H)

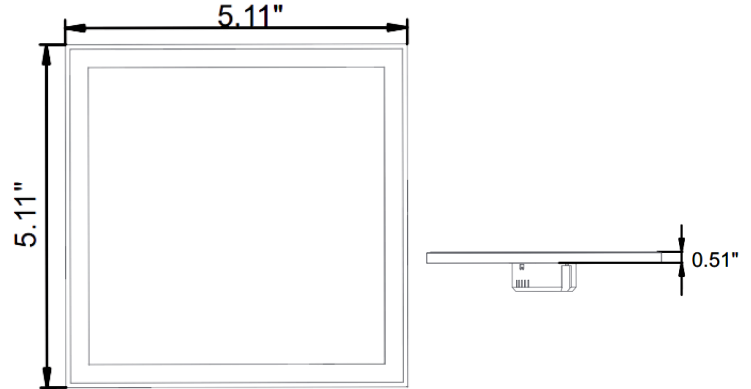

MODEL	WATTS	VOLTAGE	LUMENS UP/DOWN	COLOR TEMP
LPS-S4-50K-D	10W	120VAC	700LM	5000K
LPS-S4-40K-D	10W	120VAC	700LM	4000K
LPS-S4-30K-D	10W	120VAC	700LM	3000K

LED SURFACE MOUNT PANELS

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120VAC 50/60Hz
- Wattage: 10W
- Power factor: >0.95
- Efficacy: 70LM/W

HOUSING SPECIFICATIONS:

- White finish surface mount panel
- External Driver
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

CERTIFICATIONS: UL



LIGHTING SPECIFICATIONS:

- Dimming: TRIAC dimming
- Recommended Dimmers: DVCL-153P, MSCL-OP153M, CTCL-153P, SCL-153P
- Total lumens: 700LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >90

WARRANTY: 5 years

