


WMC SERIES OUTDOOR LIGHTING

WMC-DL-MCT-BK-DT
WMC-DL-MCT-BR-DT
WMC-DL-MCT-BN-DT
WMC-DL-MCT-WH-DT

Customer Name: _____

Project Name: _____

Note: _____ Type: _____

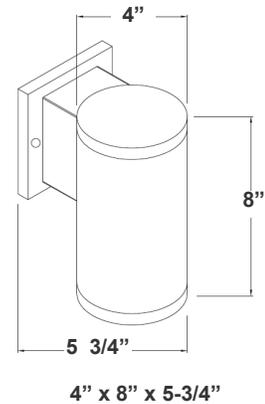

Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

Features

- Finish: Black, Bronze, Brushed Nickel & White
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- 7-Year Warranty
- Outdoor Down Light

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.95
- Wattage: 15W
- Efficacy: 80 LPW
- THD: <20%

Mechanical:

- Housing: Die-cast Aluminum & Glass
- Finish: Black, Bronze, Brushed Nickel & White
- Maximum Ambient Temperature: -68°F to 104°F
- Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1200LM
- Color Temperatures: 3000K/4000K/5000K
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 hrs
- Beam angle: 45°

Applications:



- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

Other Models:


- 30W | 2400LM | WMC-UDL-MCT-BK-DT
- 30W | 2400LM | WMC-UDL-MCT-BR-DT
- 30W | 2400LM | WMC-UDL-MCT-BN-DT
- 30W | 2400LM | WMC-UDL-MCT-WH-DT



Photometrics: WMC-DL-MCT

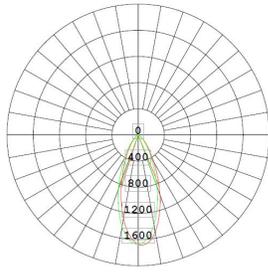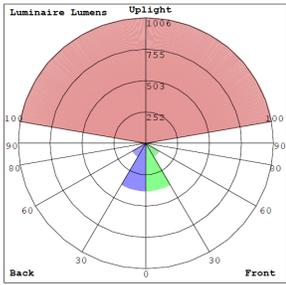

BUG Rating: B1-U1-G0

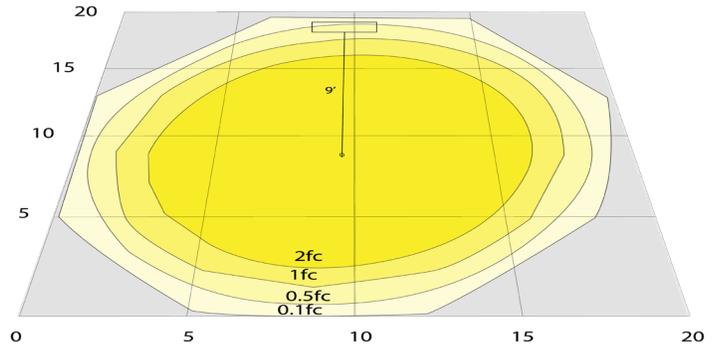

15W 5000K, Area 20'x 20' Mounting Height: 9'

Other Views:

Black Finish:



Bronze Finish:



Side View

Front View

Back View

Lens View

Brushed Nickel Finish:



Side View

Front View

Back View

Lens View

White Finish:



Side View

Front View

Back View

Lens View



Performance Table: WMC-DL-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMC-DL-MCT-BK-DT	15W	120V	1200LM	3000K/ 4000K/ 5000K	B1-U1-G0	80
WMC-DL-MCT-BR-DT	15W	120V	1200LM	3000K/ 4000K/ 5000K	B1-U1-G0	80
WMC-DL-MCT-BN-DT	15W	120V	1200LM	3000K/ 4000K/ 5000K	B1-U1-G0	80
WMC-DL-MCT-WH-DT	15W	120V	1200LM	3000K/ 4000K/ 5000K	B1-U1-G0	80

Sample Ordering

Model **Light Direction** **Color Temp.** **Finish** **Dimming**
 - - - -
 BK = Black
 BR = Bronze
 BN = Brushed Nickel
 WH = White

Factory-Installed Option:

Blank = No Option For Accessories
 OPT-PC-B = FOR 120V-277V PHOTOCELL
 OPT-EM-FM2INT = INTERNAL EMERGENCY BACK UP BATTERY

Example:

1. WMC-DL-MCT-BR-DT (FOR WMC 15W DOWN LIGHT MCT BRONZE FIXTURE 120V)
2. WMC-DL-MCT-BR-DT OPT-PC-B (FOR WMC 15W DOWN LIGHT MCT BRONZE FIXTURE 120V) (FOR 120V-277V PHOTOCELL)

FACTORY-INSTALLED OPTION:



OPT-PC-B
FOR 120V-277V PHOTOCELL



OPT-EM-FM2INT
INTERNAL EMERGENCY
BACK UP BATTERY

